


SOLISTRAND

TE Internal #: 34130 Splices, Parallel Splice, 22 - 16 AWG Wire Size, .26 - 1.65 mm² Wire Size, Serrated, .061 in [1.55 mm] Barrel Inside Diameter

View on TE.com >

Terminals & Splices > Splices

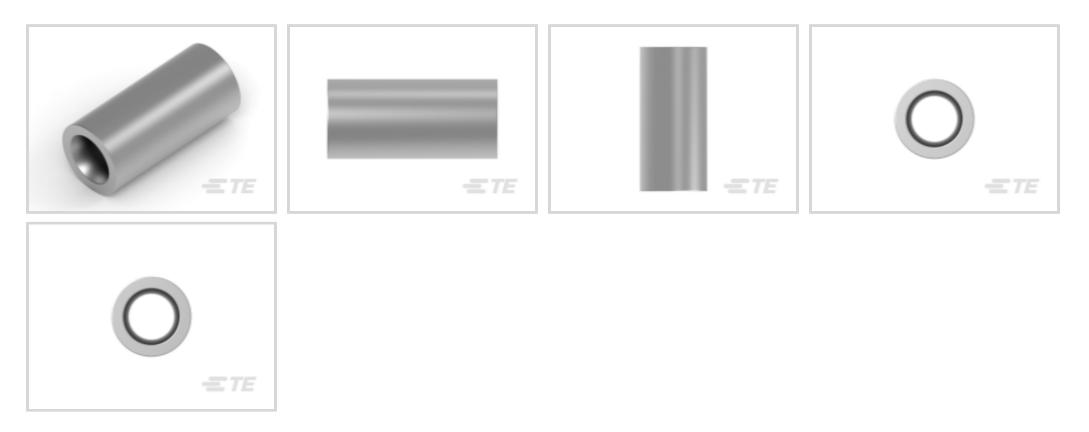

Splice Type: Parallel Splice

Wire Size: .26 - 1.65 mm²

Sealable: No

Splice Features: Serrated

Features

Product Type Features



Splice Accessory Type	Splice
Splice Type	Parallel Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	.417 g
Splice Features	Serrated
Contact Features	
	100 µin
Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed

34130

Splices, Parallel Splice, 22 - 16 AWG Wire Size, .26 - 1.65 mm² Wire Size, Serrated, . 061 in [1.55 mm] Barrel Inside Diameter



Mechanical Attachment

Wire Insulation Support	Without
Dimensions	
Outside Diameter	3.58 mm[.141 in]
Wire Size	509 - 3260 CMA
Barrel Inside Diameter	1.55 mm[.061 in]
Terminal Material Thickness	.84 mm[.033 in]
Product Length	7.65 mm[.301 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	

Packaging Method

Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


34130

Splices, Parallel Splice, 22 - 16 AWG Wire Size, .26 - 1.65 mm² Wire Size, Serrated, . 061 in [1.55 mm] Barrel Inside Diameter



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

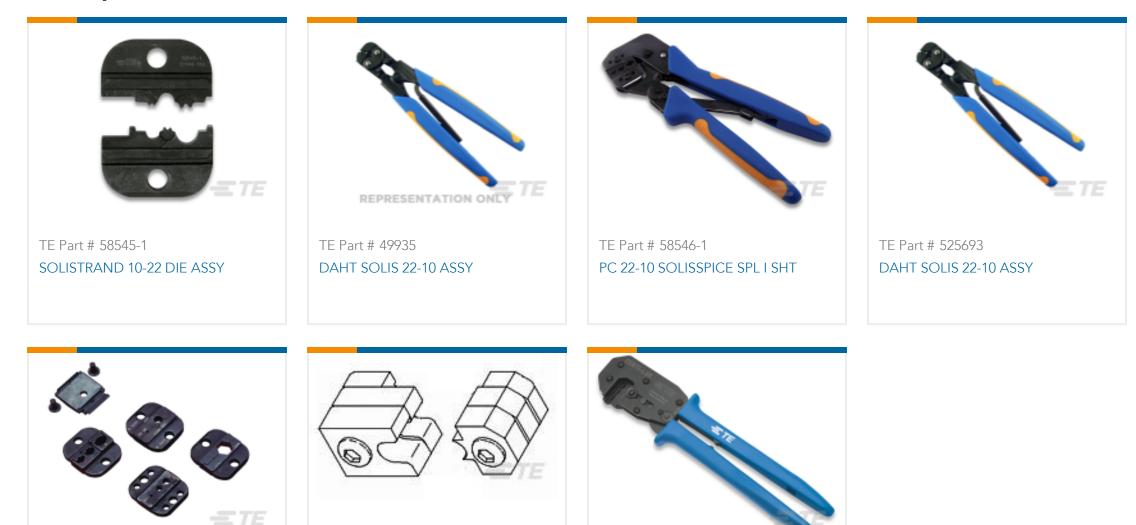




Customers Also Bought



34130

Splices, Parallel Splice, 22 - 16 AWG Wire Size, .26 - 1.65 mm² Wire Size, Serrated, . 061 in [1.55 mm] Barrel Inside Diameter



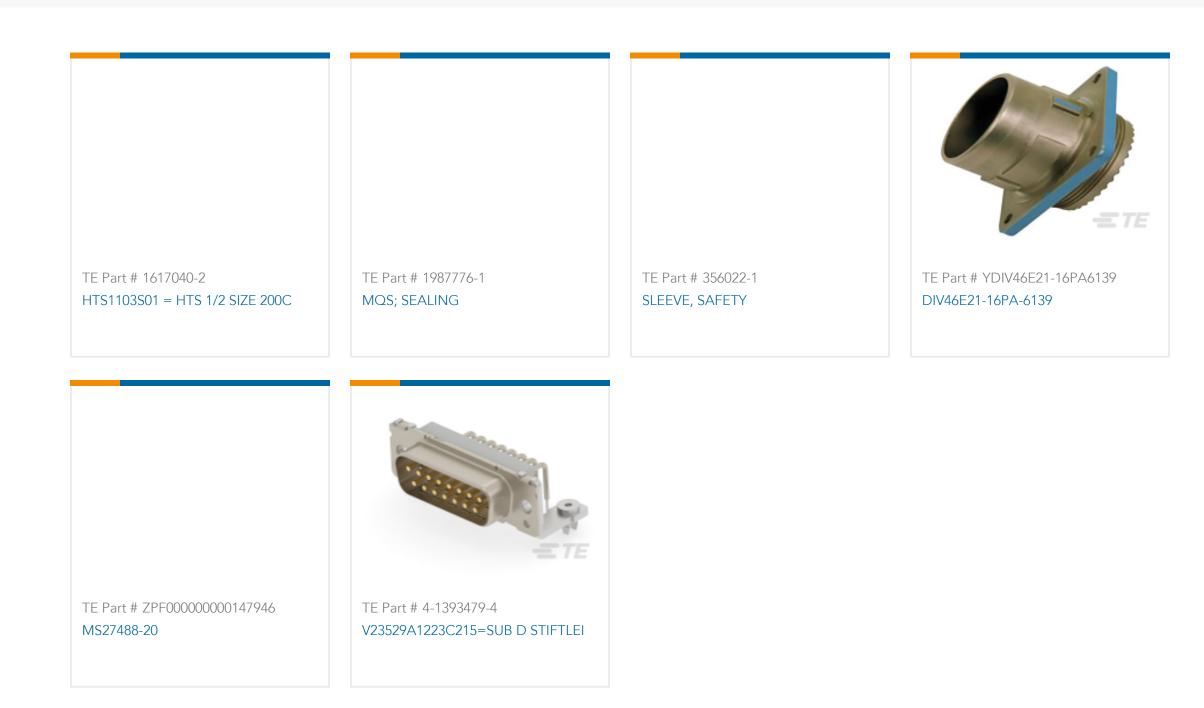

Documents

Product Drawings SPLICE, SOLIS PARA 22-16

English

CAD Files **Customer View Model** ENG_CVM_CVM_34130_L.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_34130_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_34130_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Agency Approvals UL Report

English

UL Report

English