


PF0016/20/48 Datasheet

Product Name // IEC Connector Snap Fit To Panel Fused
Inlet 2 Pin PF0016 Series 2mm Panel Black 4.8mm Tab
Termination EN60 320-1 Standard Sheet C18 Class II

 [View Product Page](#)



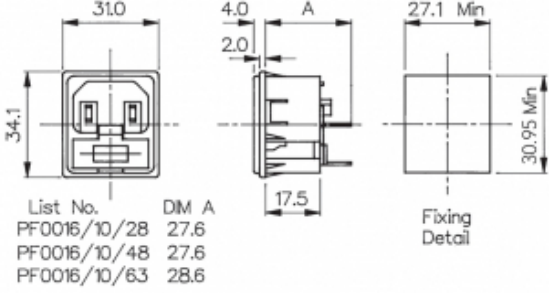

List No.	DM A
PF0016/10/28	27.6
PF0016/10/48	27.6
PF0016/10/63	28.6

// **Product Description:**

- Snap Fit Panel Mount Fused IEC Inlets
- EN60 320-1 Standard Sheet C18 Class II
- Cold Condition
- Two Pin Class II (no Earth pin)
- Single 5mm x 20mm fuse

- Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- Insulation Boot for rear of connector available separately (part code 11987)
- Mate with PX0587, PX0587/SE, PX0588

// **General Information:**

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Current Max:

Flamability Rating:

Function:

Iec Connector Colour:

Iec Connector Mates With:

Iec En60620 Type:

Max Operating Temperature:

Min Operating Temperature:

Max Panel Thickness:

Min Panel Thickness:

Number Of Contacts:

Voltage Max:

Snap Fit Panel Mount Fused IEC Inlets

IEC Connectors

IEC60320 Main Inlets and Outlets

CSA, ENEC, UL, VDE, RCM

Nylon 66

10A

UL94V-0

Panel Mount Fused Connector

Black

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C18 Class II

+70°C

-40°C

2mm

2mm

2 Contacts

250V

// **Product PDF Links**

 [IEC Connectors product data](#)