


# PXD303/050/01/1 Datasheet

Product Name // Box Style Rectangular IEC Distribution  
Unit PXD303 Series BS1363 Plug on 2M Cable 5 Shuttered  
Outlet Fused With Neon Indicator

 [View Product Page](#)

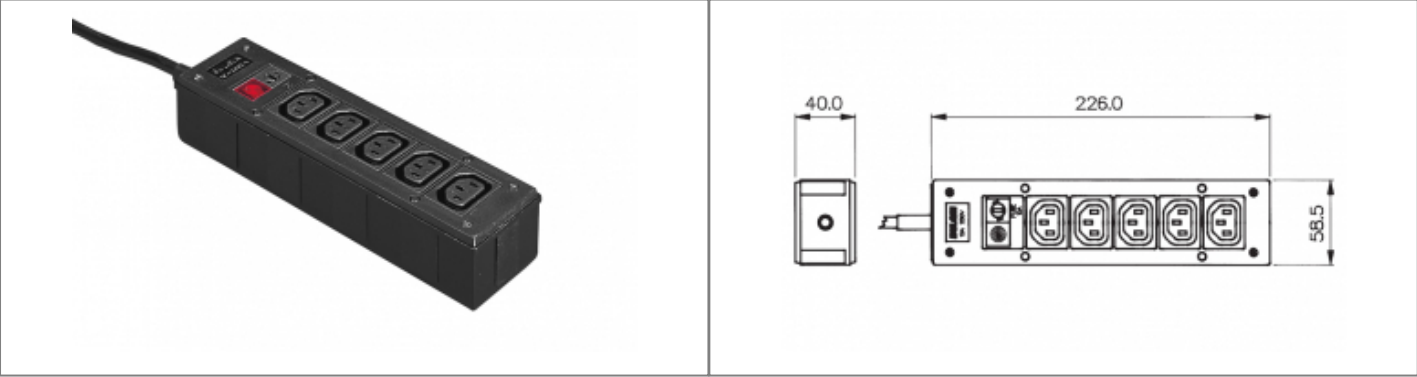

// Product Description:

- Box Style Rectangular IEC Distribution Units
- 5 shuttered Outlets
- Choice of power input depending on part code prefix:
  - PXD301: Single integral EN60320 Inlet
  - PXD303: BS1363 plug on 2M cable
- PXD306: CEE7 Sheet VII Schuko plug on 2M cable
- Choice of unfiltered (part codes containing /050) or with EMI filter fitted (part codes containing /550)
- Choice of 5mm x 20mm fuseholder and neon indicator (part codes containing /01) or Illuminated switch (part codes containing /07 are red Illuminated, part codes containing /08 are green Illuminated)
- (PXD306 only available in unfiltered version with 5mm x 20mm fuseholder and neon indicator)
- Mate with PX0686, PX0686/SE

// General Information:

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| Product Display Title:          | Box Style Rectangular IEC Distribution Units |
| Product Family:                 | IEC Connectors                               |
| Product Series:                 | IEC Distribution Units                       |
| Body Material:                  | ABS                                          |
| Current Max:                    | 10A                                          |
| Distribution Unit Light Colour: | Fused With Neon Indicator                    |
| Filter Type:                    | Unfiltered                                   |
| Flamability Rating:             | UL94V-0                                      |
| Function:                       | Rectangular Units                            |
| Iec Connector Mates With:       | PX0686,PX0686/SE                             |
| Inlet Type:                     | BS1363 Plug on 2M Cable                      |
| Max Operating Temperature:      | +60°C                                        |
| Min Operating Temperature:      | -5°C                                         |
| Number Of Contacts:             | 3 Contacts                                   |
| Number Of Outlets:              | 5 Shuttered Outlet                           |
| Voltage Max:                    | 250V                                         |

// Product PDF Links

 [Power Distribution Units product...](#)



Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)