


PXPPVC08FIM05BCL010PVC Datasheet

Product Name // M8 Series B Code PVC In-Line
Overmould Flex Cable Connector 5 Contact Pins Pre-Wired
With 1M PVC Jacket Cable

 [View Product Page](#)

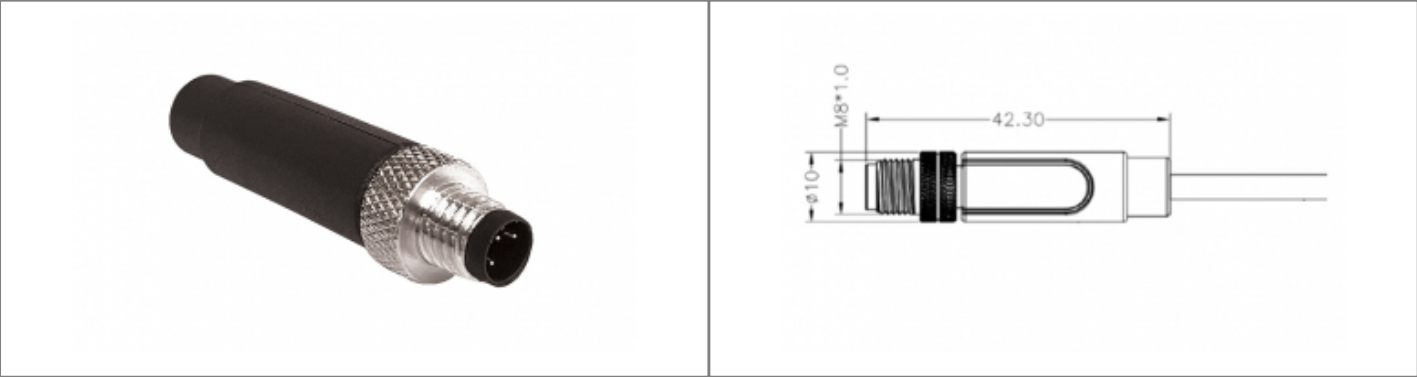

// Product Description:	
 M8 Series In-Line Overmould Flex Body Connectors	 3, 4, 5 Contact (3, 4 Contact are A Code, 5 Contact are B Code)
 Water and dustproof to IP67 when mated with compatible connector	 Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
 Pin only	 Mate with M8 Series Flex Body and Panel Mount Connectors

// General Information:	
Product Display Title:	M8 Series In-Line Overmould Flex Body Connectors
Product Family:	Circular Automation Connectors
Product Series:	M8 Series
Approvals:	CSA, ENEC, VDE
Body Material:	PVC
Cable Length:	1m
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	1.5A
Diameter Over Coupling Ring Mm:	12.5mm
Function:	Inline Connector Single Ended Cable
Ip Rating:	IP67
Max Operating Temperature:	+80°C
Min Operating Temperature:	-25°C
Number Of Contacts:	5 Contacts
Pin Layout Code:	B Code
Rohs Compliant:	Yes
Sheath Material:	PVC
Thread Size:	M8 x 1
Voltage Max:	30V

// Product PDF Links

 M8 Series automation connectors...