
PXPTPU12FIM08ACL010PUR Datasheet

Product Name // M12 Series A Code TPU In-Line Overmould Flex Cable Connector 8 Contact Pins Pre-Wired With 1M PUR Jacket Cable

View Product Page

bulgin

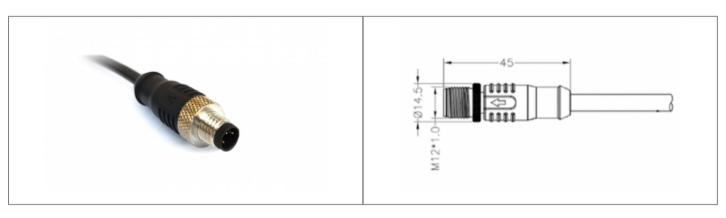

// Product Description:

- O M12 Series In-Line Overmould Flex Body Connectors
- O Water and dustproof to IP67 when mated with compatible connector
- O Pin only
- 3, 4, 5, 8, 12 Contact (3, 8, 12 Contact are A Code, 4 Contact are choice of A Code or D Code, 5 Contact are choice of A Code or B Code)
- O Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- O Choice of Sealing Caps available separately to maintain IP rating of unmated connectors
- O Mate with M12 Series Flex Body and Panel Mount Connectors

// General Information:

Product Display Title: Product Family: Product Series: **Body Material:** Cable Length: Contact Type: Coupling Type: Current Max: **Diameter Over Coupling Ring Mm:** Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Pin Layout Code: **Rohs Compliant:** Sheath Material: Thread Size: Voltage Max:

M12 Series In-Line Overmould Flex Body Connectors **Circular Automation Connectors** M12 Series TPU 1m Plug Contact Screw 2A 20mm Inline Connector Single Ended Cable IP67 +80°C -25°C 8 Contacts A Code Yes PUR M12 x 1 30V

// Product PDF Links

M12 Series automation connectors.

// Product 3D CAD Model Links

PXPTPU12FIM08ACL010PUR3D CAD Mo