
PX0911/04/P Datasheet



Product Name // Flex Cable Connector PX0911 Series 4 Contact Plug 13mm-15mm Cable (Yellow Gland)

View Product Page



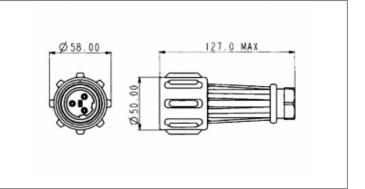

// Product Description:

- Flex Cable Connectors
- Water and dustproof to IP68 when mated with compatible connector
- O Positive fast-acting locking ring can be turned with a gloved hand
- O Plug or Socket
- Q 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- O Screw Terminals

- O Choice of cable acceptance 7mm-22mm diameter depending on part code (see data for details):
- O PX09 part codes 7mm-15mm diameter
- O PXA9 part codes (large cable version with strain relief clamp)
 14mm-22mm diameter
- Packs of Cable Glands for differing cable diameters available separately (PX0980, PXA980)
- PX0960/PX0990 Sealing Caps available separately to maintain
 IP rating of unmated connectors
- Mate with PX09 or PXA9 Series Flex and Panel Mount Connectors, as appropriate

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2:

Min Contact Accomodation Mm2:
Min Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:

Number Of Contacts: Voltage Max:

Flex Cable Connectors

Circular Power Connectors

900 Series Buccaneer

UL

Polyamide (PA)

Plastic Body

Plug Contact Screw

32A

58mm

UL94V-0

Flex Cable Connector

IP68

15mm 13mm

13AWG

10AWG

4mm2 2.6mm2

+85°C

-40°C

4 Contacts 600V

// Product PDF Links

900 Series power connectors...

900 Series power connectors wiring.

// Product 3D CAD Model Links

PX0911/04/P3D CAD Model