


G3VM-□C□/□F□/□CR/□FR

MOS FET Relays DIP 8-pin, Multi-contact-pair Type

MOS FET Relays in DIP 8-pin packages with multiple contact pairs for a wide range of circuits

- Contact form: 2a (DPST-NO), 2b (DPST-NC), 1a1b (SPST-NO/SPST-NC)
- Load voltage: 60 V, 350 V, or 400 V

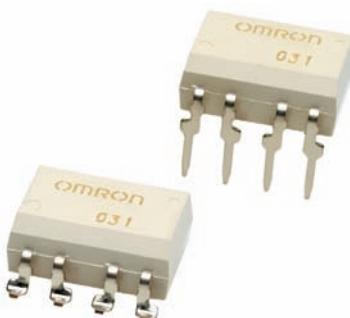

Note: The actual product is marked differently from the image shown here.

DIP

G3VM-□C□/□F□/□CR/□FR


RoHS Compliant

Application Examples


- Communication equipment
- Test & Measurement equipment

■ Package (Unit : mm, Average)

DIP 8-pin
PCB Terminals



Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

■ Model Number Legend

G3VM-□ □ □ □ □
1 2 3 4 5

- | | | |
|-----------------|------------------|---|
| 1. Load Voltage | 2. Contact form | 3. Package |
| 6 : 60 V | 2 : 2a (DPST-NO) | C : DIP 8-pin with PCB terminals |
| 35 : 350 V | 4 : 2b (DPST-NC) | F : DIP 8-pin with surface-mounting terminals |
| 40 : 400 V | 5 : 1a1b | (SPST-NO/SPST-NC) |

4. Additional functions
R: Low ON resistance

5. Other informations

When specifications overlap, serial code is added in the recorded order.

■ Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging			Tape packaging	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals			
DIP8	2a (DPST-NO)	60 V	500 mA	G3VM-62C1	G3VM-62F1	50 pcs.	G3VM-62F1(TR)	1,500 pcs.
	2b (DPST-NC)	350 V	120 mA	G3VM-352C	G3VM-352F		G3VM-352F(TR)	
			150 mA	G3VM-354C	G3VM-354F		G3VM-354F(TR)	
			120 mA	G3VM-355CR	G3VM-355FR		G3VM-355FR(TR)	
	1a1b (SPST-NO/SPST-NC)	400 V		G3VM-402C	G3VM-402F		G3VM-402F(TR)	

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" to the end of the model number.

■Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-62C1 G3VM-62F1	G3VM-352C G3VM-352F	G3VM-354C G3VM-354F	G3VM-355CR G3VM-355FR	G3VM-402C G3VM-402F	Unit	Measurement conditions
Input	LED forward current	I _F		50			mA	
	Repetitive peak LED forward current	I _{FP}		1			A	100 μs pulses, 100 pps
	LED forward current reduction rate	$\Delta I_F/\text{ }^\circ\text{C}$		-0.5			mA/ $\text{ }^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	V _R		5			V	
	Connection temperature	T _J		125			$^\circ\text{C}$	
Output	Load voltage (AC peak/DC)	V _{OFF}	60	350	400	V		
	Continuous load current (AC peak/DC)	I _O	500	120	150	120	mA	
	ON current reduction rate	$\Delta I_O/\text{ }^\circ\text{C}$	-5	-1.2	-1.5	-1.2	mA/ $\text{ }^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	Pulse ON current	I _{OP}	1,500	360	450	360	mA	t=100 ms, Duty=1/10
	Connection temperature	T _J		125			$^\circ\text{C}$	
Dielectric strength between I/O *		V _{I-O}		2,500			V _{rms}	AC for 1 min
Ambient operating temperature		T _a		-40 to +85			$^\circ\text{C}$	With no icing or condensation
Ambient storage temperature		T _{STG}		-55 to +125			$^\circ\text{C}$	
Soldering temperature		-		260			$^\circ\text{C}$	10 s

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.




DIP

G3VM-□C□/□F□/□CR/□FR

■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-62C1 G3VM-62F1	G3VM-352C G3VM-352F	G3VM-354C G3VM-354F	G3VM-355CR G3VM-355FR	G3VM-402C G3VM-402F	Unit	Measurement conditions	
Indu	LED forward voltage	V _F	Minimum	1.0			V	I _F =10 mA	
			Typical	1.15					
			Maximum	1.3					
	Reverse current	I _R	Maximum	10			μA	V _R =5 V	
	Capacitance between terminals	C _T	Typical	30			pF	V=0, f=1 MHz	
	Trigger LED forward current	I _{FT} (I _{FC}) *2	Typical	1.6	1		mA	G3VM-62C1/62F1/352C/352F/402C/402F : I _O =Continuous load current ratings G3VM-354C/354F : I _{OFF} =10 μA G3VM-355CR/355FR : 1a : I _O =120 mA, 1b : I _{OFF} =10 μA	
	Release LED forward current	I _{FC} (I _{FT}) *2	Maximum	3					
Indu/O	Maximum resistance with output ON	R _{ON}	Typical	1	35 (25)	15	18	Ω	G3VM-62C1/62F1/402C/402F/352C/352F : I _O =5 mA, I _O =Continuous load current ratings Values in parentheses are for t < 1 s. G3VM-354C/354F : I _O =150 mA G3VM-355CR/355FR : 1a : I _F =5 mA, I _O =120 mA, 1b : I _F =0 mA, I _O =120 mA
			Maximum	2	50 (35)	25	35		
	Current leakage when the relay is open	I _{LEAK}	Maximum	1			μA	G3VM-354C/354F : V=0, f=1 MHz, I _F =5 mA G3VM-355CR/355FR : 1a : V=0, f=1 MHz 1b : V=0, f=1 MHz, I _F =5 mA Others : V=0, f=1 MHz	
	Capacitance between terminals	C _{OFF}	Typical	130	30	85	65	40	pF V=0, f=1 MHz
	Capacitance between I/O terminals	C _{I-O}	Typical	0.8					pF f=1 MHz, Vs=0 V
	Insulation resistance between I/O terminals	R _{I-O}	Minimum	1000					MΩ V _{I-O} =500 VDC, RoH≤60%
Turn-ON time	t _{ON}	Typical	0.8	0.3	0.1	—	ms I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *1		
Turn-OFF time	t _{OFF}	Typical	0.1	0.1	1	1a : 1, 1b : 1	—		
			Maximum	0.5	1	3	1a : 1, 1b : 3	1	

*1. Turn-ON and Turn-OFF Times

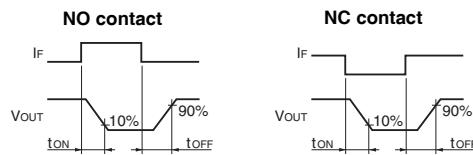

*2. These values are for Relays with NC contacts

■ Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol	G3VM-62C1 G3VM-62F1	G3VM-352C G3VM-352F	G3VM-354C G3VM-354F	G3VM-355CR G3VM-355FR	G3VM-402C G3VM-402F	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	48	280	—	320	V
Operating LED forward current	I _F	Minimum	5				mA
		Typical	7.5	—	7.5		
		Maximum	25				
Continuous load current (AC peak/DC)	I _O	Maximum	500	100	150	120	100
Ambient operating temperature	T _a	Minimum	—	-20			°C
		Maximum	65				

■ Spacing and Insulation


Item	Minimum	Unit
Creepage distances	7.0	mm
Clearance distances	7.0	
Internal insulation thickness	0.4	

■Engineering Data


● LED forward current vs.
Ambient temperature

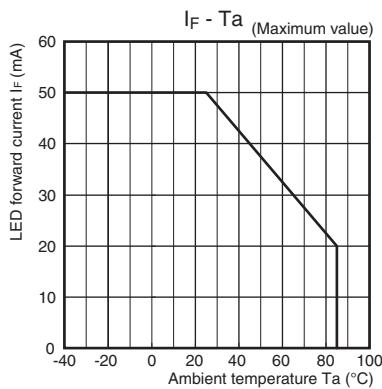

● Continuous load current vs.
Ambient temperature

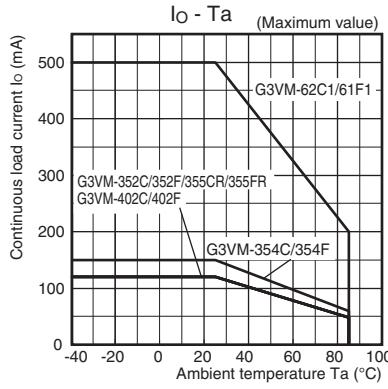


● LED forward current vs.
LED forward voltage

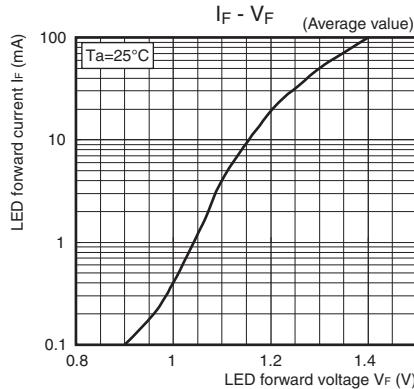


● Continuous load current vs. On-state voltage

G3VM-62C1/62F1

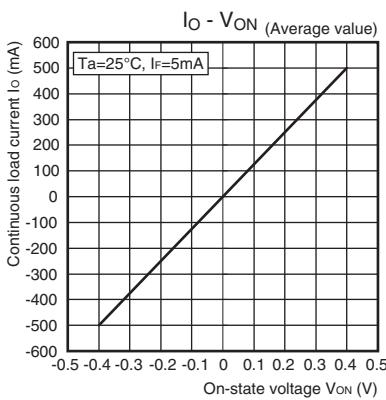


G3VM-352C/352F/402C/402F
G3VM-355CR/355FR [SPST-NO Contacts]

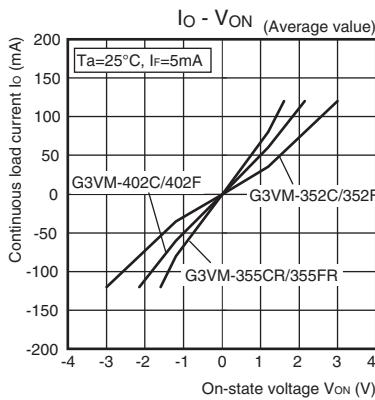


G3VM-354C/354F

G3VM-355CR/355FR [SPST-NC Contacts]

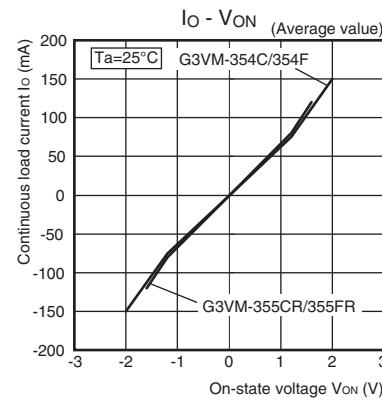


● On-state resistance vs. Ambient temperature

G3VM-62C1/62F1

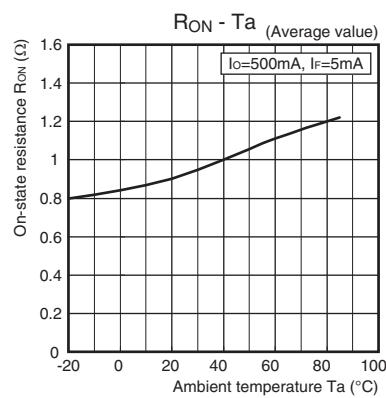


G3VM-352C/352F/402C/402F
G3VM-355CR/355FR [SPST-NO Contacts]

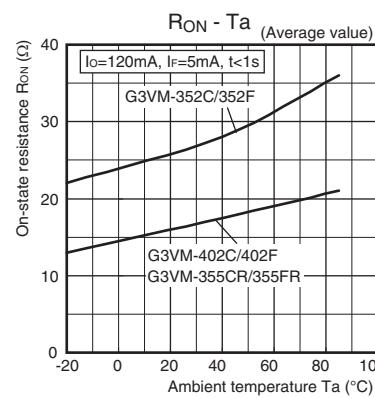


G3VM-354C/354F

G3VM-355CR/355FR [SPST-NC Contacts]

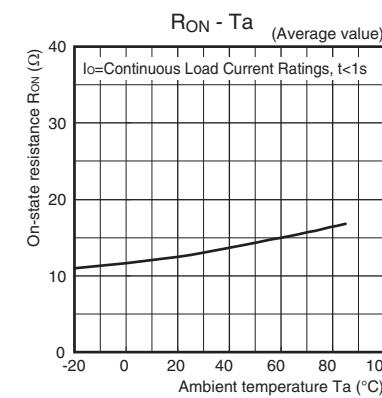


● Trigger LED forward current vs. Ambient temperature

G3VM-62C1/62F1

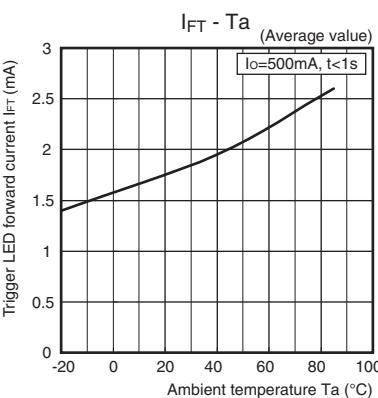


G3VM-352C/352F/402C/402F
G3VM-355CR/355FR [SPST-NO Contacts]

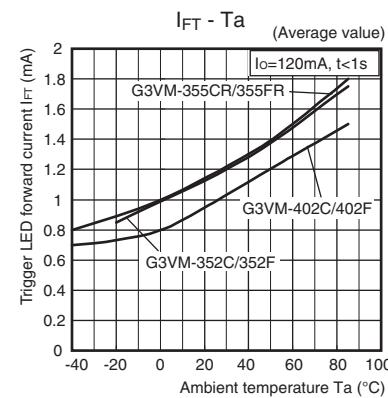

G3VM-354C/354F

G3VM-355CR/355FR [SPST-NC Contacts]

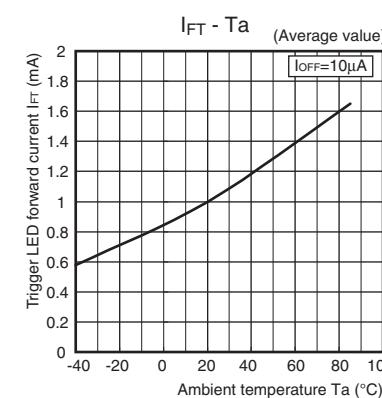


■Engineering Data

● Turn ON, Turn OFF time vs.

LED forward current


G3VM-62C1/62F1

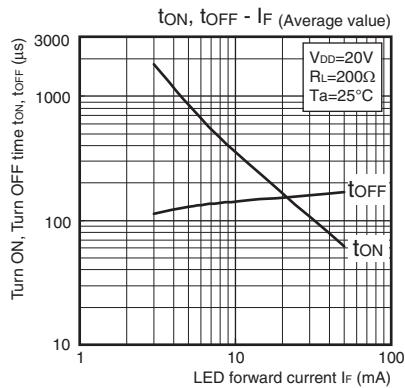

● Turn ON, Turn OFF time vs.

Ambient temperature


G3VM-62C1/62F1

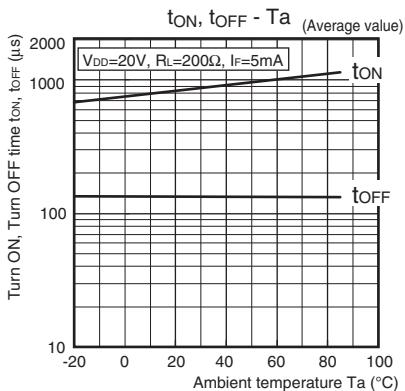


● Current leakage vs.

Ambient temperature


G3VM-62C1/62F1/352C/352F/402C/402F
G3VM-355CR/355FR [SPST-NO Contacts]

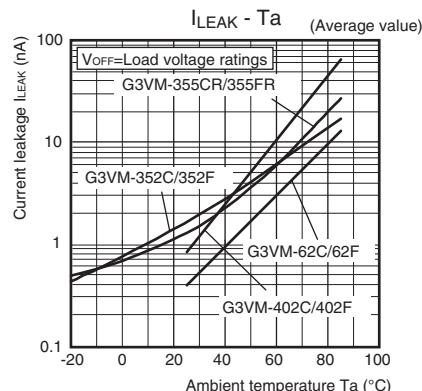


G3VM-352C/352F/402C/402F
G3VM-355CR/355FR [SPST-NO Contacts]

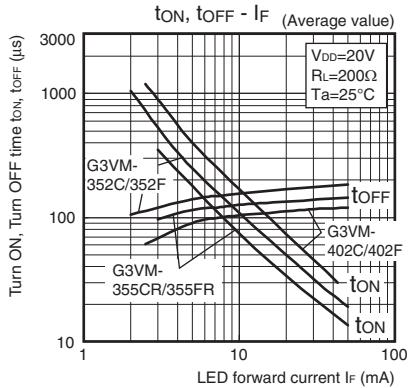


G3VM-354C/354F
G3VM-355CR/355FR [SPST-NC Contacts]

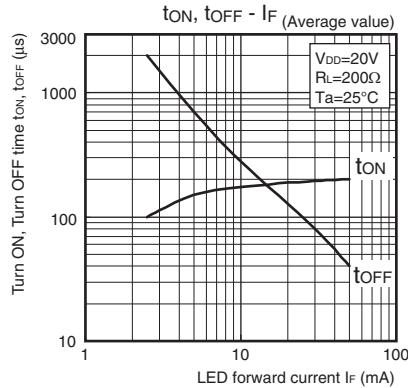


G3VM-352C/352F/402C/402F
G3VM-355CR/355FR [SPST-NO Contacts]

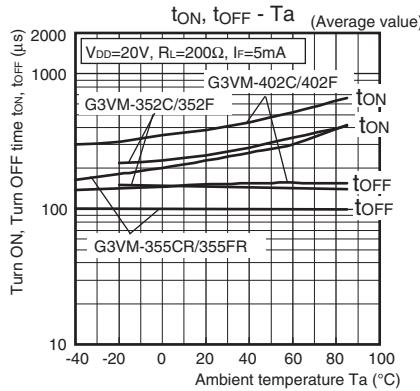

G3VM-354C/354F
G3VM-355CR/355FR [SPST-NC Contacts]

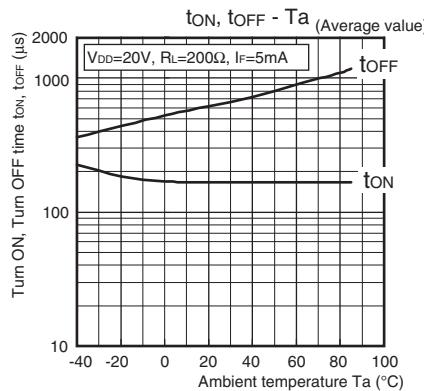

G3VM-354C/354F
G3VM-355CR/355FR [SPST-NC Contacts]

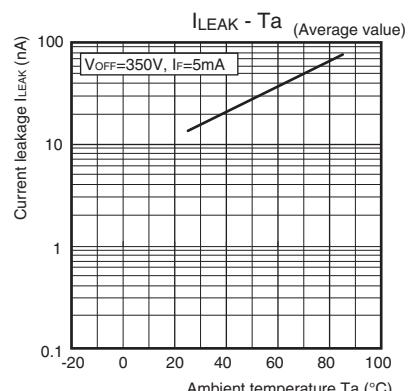


■Appearance / Terminal Arrangement / Internal Connections

●Appearance

DIP (Dual Inline Package)

DIP 8-pin

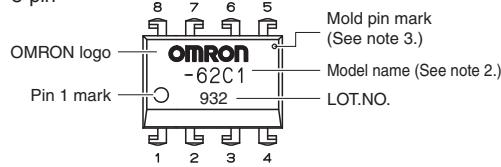


Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.


Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)


G3VM-62C1/62F1/352C/352F/402C/402F

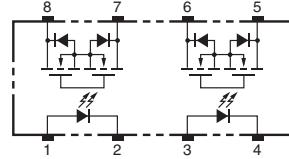

G3VM-354C/354F

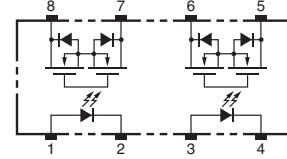

G3VM-355CR/355FR

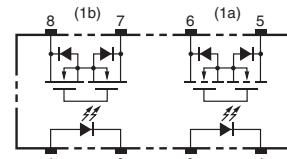


■Dimensions (Unit: mm)

DIP 8-pin




PCB Terminals

Weight: 0.54 g

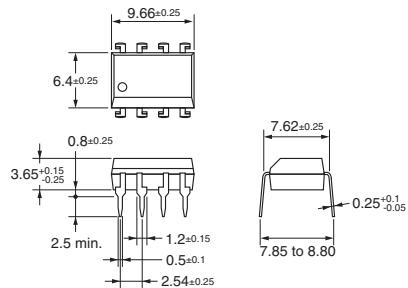


Surface-mounting Terminals

Weight: 0.54 g

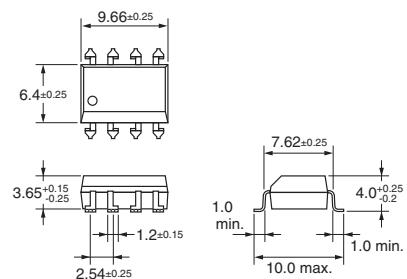


PCB Dimensions (BOTTOM VIEW)

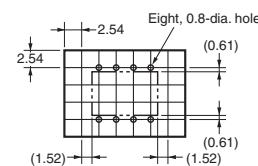

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-62C1 G3VM-62F1 G3VM-352C G3VM-352F G3VM-402C G3VM-402F	UL (recognized)	2a (DPST-NO)	E80555
G3VM-354C G3VM-354F		2b (DPST-NC)	
G3VM-355CR G3VM-355FR		1a1b (SPST-NO/SPST-NC)	

Models Certified by BSI for EN/IEC Standards

Model	Approved Standards	Contact form	File No.
G3VM-352C G3VM-352F	EN62368-1 (BSI certified)	2a (DPST-NO)	VC669156

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

DIP

G3VM-□C□/□F□/□CR/□FR

Please check each region's Terms & Conditions by region website.

OMRON Corporation Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>