


PXF6054BAB Datasheet

Product Name // 10 M, OM1 Multi Mode, Cabled, Flex fiber connector

 [View Product Page](#)

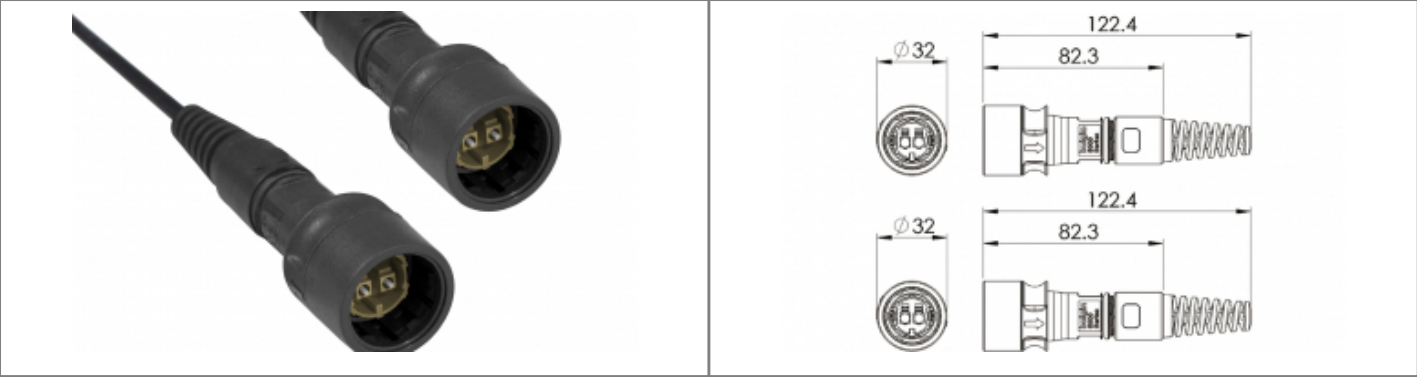

// Product Description:

Flex Fiber Connector to Inline Fiber Connector

Sealed to IP66, IP68, IP69K when mated with compatible connector

no cable options, or pre-terminated from 5M - 450M available

Duplex LC type fiber connector

Choices of OS1, OM1 and OM3 cables for single or multimode

PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors

Mate with Inline fiber connector or panel mount connectors PXF6051, PXF6052

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material:

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

Flex Fiber Connector to Inline Fiber Connector

Circular Fiber Connectors

6000 Series - Duplex LC Fiber Buccaneer

Polyamide (PA)

LC Fiber

30 Degree coupling

32mm

OM1

UL94V-0

Flex to Double LC Connector Double Ended Fiber Cable

IP66, IP68, IP69K

+70°C

-25°C

// Product PDF Links



[6000 Series Fiber connectors...](#)