
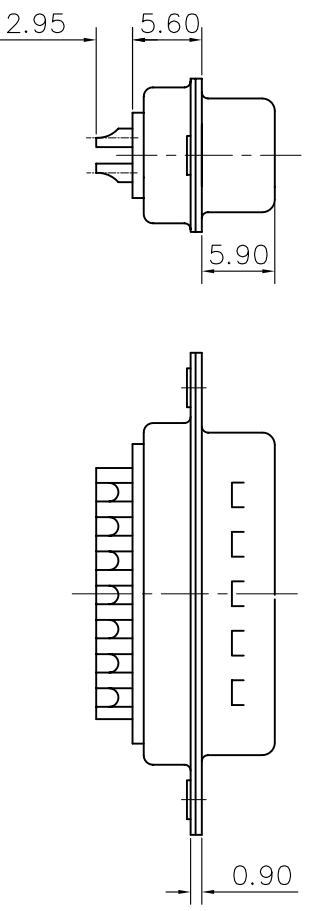


This document is the property of Amphenol Corporation and is delivered on the understanding that it is for the sole use of the recipient. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior written permission of Amphenol Corporation. All rights are reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior written permission of Amphenol Corporation.

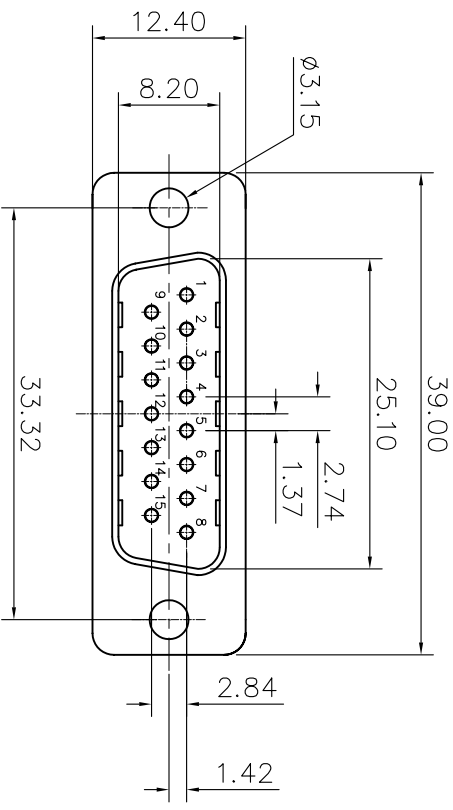


REVISONS			DATE	APPROVED
SYM	ECN	DESCRIPTION	DATE	APPROVED
A			07/26/07	

D-SUB TECHNICAL DATA

SHELL : Steel 2.5um(100u") min tin over 1.25um(50u") min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0 Color Black
 CONTACTS : brass
 0.1um(4u") min gold over 1.25um(50u") min nickel
 ELECTRICAL : Voltage rating : 300 V RMS at 50 Hz
 Current rating 7.5A.
 Insulation resistance >5000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -55 °C up to 85°C
 Damp heat 21 days(40 °C-95% HR)
 MARKING : Amphenol---(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L717D A 15P

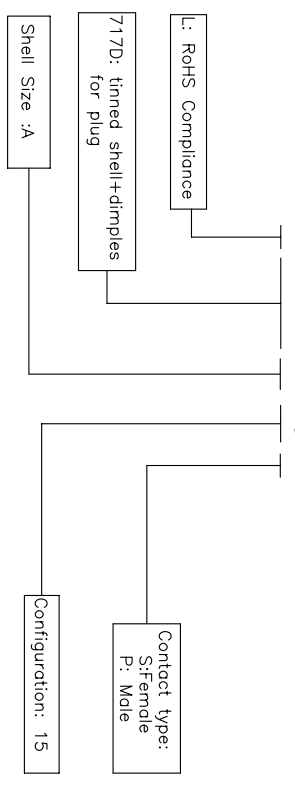

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE
TOLERANCES		DRAWN	Issued by	07/26/07
U.S.	METRIC	CHECKED	146.44444	07/26/07
X	±0.50			
XX	±0.30			
XXX	±0.20			
FRACTIONS	±0.20			
ANGLES	±0.2°			
FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES				
DIMENSIONS				
U.S.	DIMENSIONS		INCHES	
METRIC	DIMENSIONS		MM	
DRAWING FILE :				
ANGLE OF PROJECTION				
TITLE				
Fixedmolded contact connector, D series				
SIZE	DRAWING NO.		REV.	
A4	C L717DA15P		A	
SCALE	NONE		SHEET 1 OF 1	