

Crydom

See full Datasheet below...

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUY NOW

 **MASTER**TM
E L E C T R O N I C S

BUY NOW

masterelectronics.com & onlinecomponents.com
are **authorized** e-commerce distributors
of electronic components.

DC Output Buffered Modules

- **Compatible with 5 & 15 Volt Logic Systems**
- **Buffered Inverting and Non-Inverting Modules**

Buffered output modules contain additional internal amplification to reduce drive requirements to a level suitable for the MOS devices used in many micro-processor systems. To further reduce the need for additional interface components, they are available with both inverting and non-inverting inputs, for 5 volt or 15 volt logic.

CRYDOM

Control over power

INPUT SPECIFICATIONS

(All voltages referenced to pin 5)

	6311	6321	6341	6351
Nominal Input Voltage [Vdc]	5	5	15	15
Output Module Type	Non-Inverting	Inverting	Non-Inverting	Inverting
Must Turn On Voltage Range @ pin 4 [Vdc]	0.0 - 0.8	2.4 - 6.0	0.0 - 2.0	8.0 - 18
Must Turn Off Voltage Range @ pin 4 [Vdc]	2.4 - 6.0	0.0 - 0.8	8.0 - 18	0.0 - 2.0
Max. Input On-Current (Sink) @ pin 4 [µA]	75 @ 0.8V 100 @ 0.0V	Ñ Ñ	175 @ 2.0V 250 @ 0.0V	Ñ Ñ
Max. Input On-Current (Source) @ pin 4 [µA]	Ñ Ñ	75 @ 2.4V 250 @ 6.0V	Ñ Ñ	75 @ 8.0V 200 @ 18V
Max. Input Current For Output (Sink)	10	10	10	10
Off-State @ pin 4 [µA] @ (Source)	10	10	10	10
Logic Supply Voltage Range [Vdc]	3.5 - 6.0	3.5 - 6.0	10 - 18	10 - 18
Max. Logic Supply Current (w/o LED) @ 5Vdc [mA] ①	20	20	25	25
Max. Logic Supply Current (w/ LED) @ 5Vdc [mA] ①	15	15	22	22

OUTPUT SPECIFICATIONS

Load Current Range @ 45°C [A]	0.02 - 3.5	0.02 - 3.5	0.02 - 3.5	0.02 - 3.5
Load Voltage Range [Vdc]	3.0 - 60	3.0 - 60	3.0 - 60	3.0 - 60
Max. Surge Current [A]	5.0	5.0	5.0	5.0
Max. On-State Voltage [Vdc]	1.5	1.5	1.5	1.5
Max. Off-State Leakage [mA]	1.0	1.0	1.0	1.0
Max. Turn On Time [µS]	100	100	100	100
Max. Turn Off Time [µS]	100	100	100	100
Transient Overvoltage [Vdc]	60	60	60	60

GENERAL NOTES

© 2002 CRYDOM CORP Specifications subject to change without notice.

- ① LED optional. Placed in series with pin 3 for status indication.
- ② Max. allowable leakage current from driver maintain output off-state.
- ③ Inductive loads must be diode suppressed.

For recommended applications and more information contact:

USA: Sales Support (877) 502-5500 Tech Support (877) 702-7700 FAX (619) 710-8540
Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154

Email: sales@crydom.com **WEB SITE:** http://www.crydom.com

UK: +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 Cobham Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com.
GERMANY: +49 (0)180 3000 506



DC Output Buffered Modules




Control over power

GENERAL SPECIFICATIONS

Min. Dielectric Input/Output (1 minute)	4,000 VRMS
Min. Isolation Resistance Input/Output (@ 500V)	10 ¹⁰ Ohms
Capacitance input to output	8 pF
Temperature Range Ñ Operating	-40°C to 80°C
Temperature Range Ñ Storage	-40°C to 125°C

CURRENT DERATING CURVE

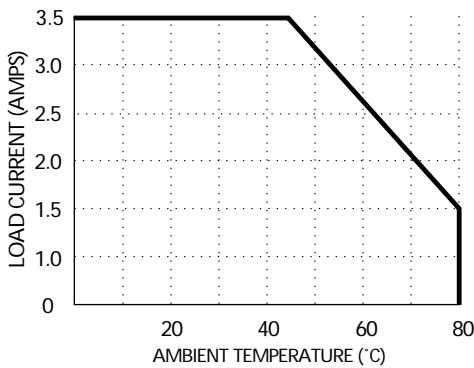



Max. Load Current vs. Temp.

BUFFERED OUTPUT MODULES

A buffered non-inverting module turns on when pin 4 is held in the low state (logic 0), the same as standard modules driven in the sink mode. A buffered inverting module conversely turns on when pin 4 is held high (logic 1). In the absence of an input signal and/or logic supply (open Circuit), all models will be in the off-state.

Buffered modules may be used with standard 5 pin PB or MS mounting boards. However, the 3.3K pull-up resistor will add to the logic drive current of a non-inverting module and may be removed. For an inverting module, the resistor must be removed to avoid a false On command, unless a normally closed condition is desirable for use with a ground seeking (logic 0) signal source.

WIRING & MECHANICAL DIAGRAMS

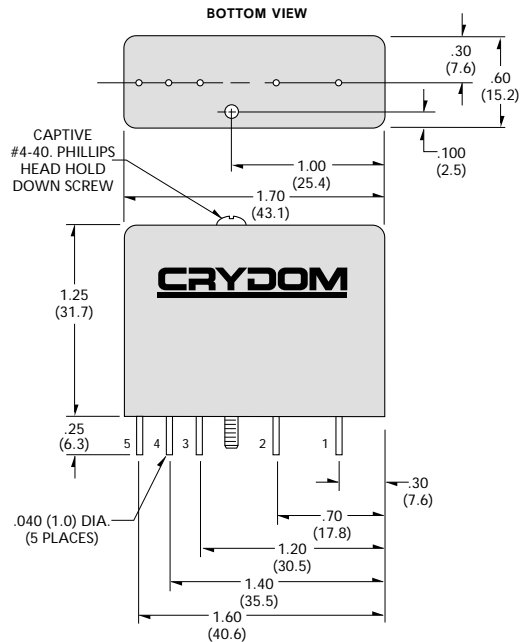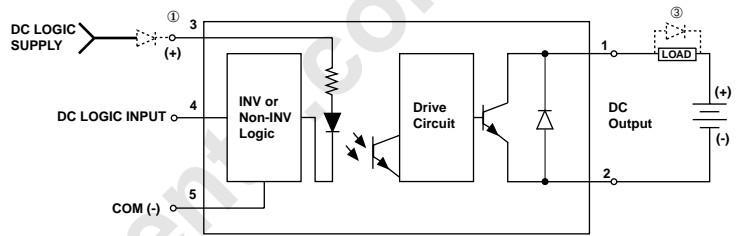

All dimensions are in inches (millimeters)

© 2002 CRYDOM CORP Specifications subject to change without notice.

