


# GSD

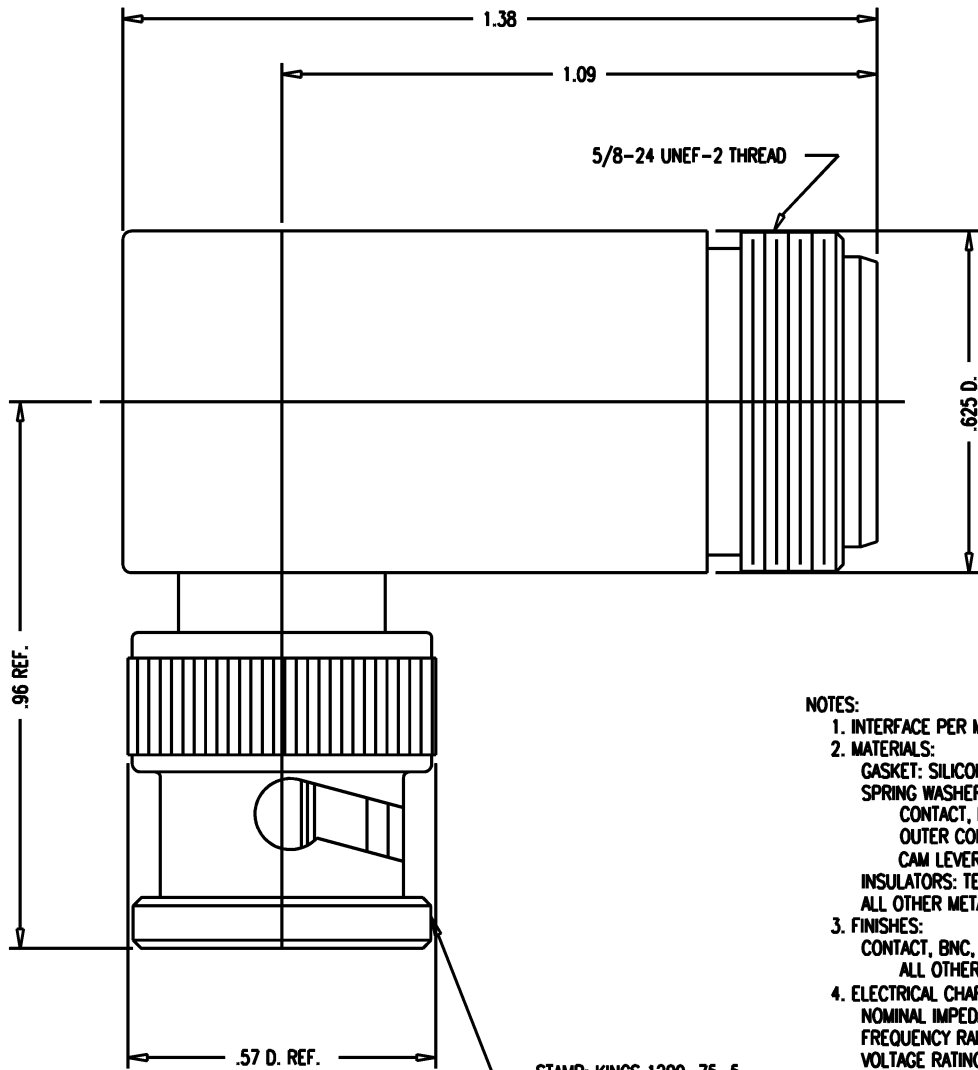

**NOTES:**

1. INTERFACE PER MIL-STD, FIGURES 313-1 (BNC) AND 304-2 (N)
2. MATERIALS:
  - GASKET: SILICON RUBBER, ZZ-R-765
  - SPRING WASHER
  - CONTACT, F } BER. COPPER, ASTM-B-194
  - OUTER CONTACT }
  - CAM LEVER: BRASS, ASTM-B36
  - INSULATORS: TEFLON, ASTM-D-4894
  - ALL OTHER METAL PARTS: BRASS, ASTM-B16, H02
3. FINISHES:
  - CONTACT, BNC, M & CONTACT, N, F: GOLD PLATE PER MIL-G-45204
  - ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
  - NOMINAL IMPEDANCE: 50 OHMS
  - FREQUENCY RANGE: 0-4 GHz
  - VOLTAGE RATING: 500 VOLTS RMS

STAMP: KINGS 1209-75-5

# GSD

1209-75-5

**REVISIONS**

ISSUE	CHANGES
0	ER 37182 PG 11/25/96

JJS0129

SCALE 4:1
APPROX SURFACE AREA
WAS E-19241
USED ON
REF:
ADPT, ANG, BNC-N, M-F
DRAWN PG 11/20/96
DESIGN LI 11/20/96
APPR. DATE
<b>KINGS</b> ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707

1209-75-5